

Dimensions and data sheet -- VIVA Coin Checker

Installation location requirements

All bremer appliances are ready for operation when supplied. Before appliance installation, the required site connections must be installed and up to 1 metre from the appliance. This preparation work must be performed by qualified specialists in accordance with applicable regulations and bremer installation instructions. The distance of the bremer appliance to the wall must be at least 4 cm (for air circulation). Leave a least 300 mm of free space above. Installation right or left of the coffee machine (standard right).

Electrical connection

The product is supplied with earthing contact plug; ensure that an easily accessible earthing contact socket is available.

A connection must be made to the potential equalisation system. For increased safety, we recommend adding a fault current safety switch.

Design: 230 V, 1 N, 50 Hz, 0.1 kW, fuse 1 x 16 A

Dimensions: 153 x 333 x 182 mm (W x H x D)

Performance

Thirty prices, electronic.


Cash box and switching device are lockable.

Accommodates 5 different coins and tokens.

Coin/token diameter: 15 to 31 mm

Coin/token thickness: 1.5 to 3.3 mm

Compatible to the euro.

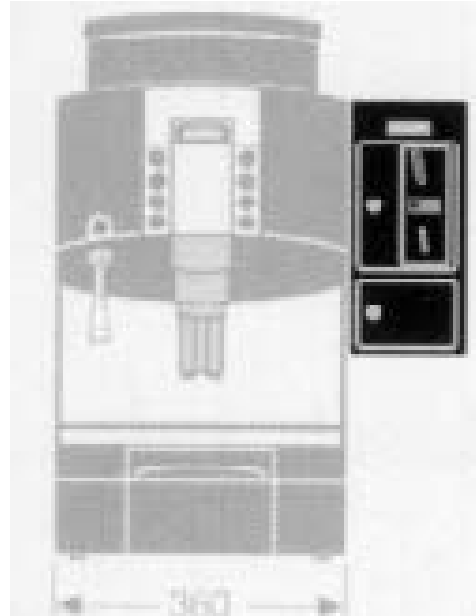

Weight: Coin Checker 5 kg

