


Technical data

Evolution Basis milk system CF

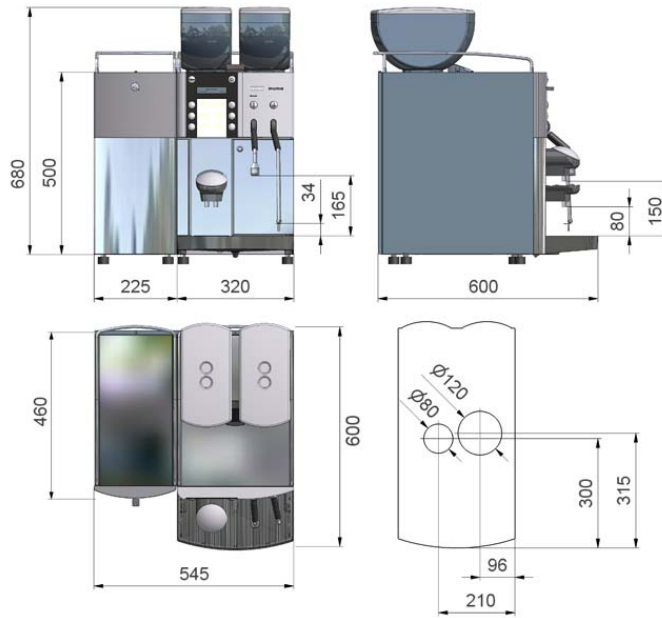

Water feeding

- Flexibel metal tube with two coupling
Rings G3/8", l = 1500 mm
- Cold water connection G3/8"
exterior screw thread
- Water pressure 80-600 kPa (0.8-6.0 bar)
- Stop valve with nonreturn valve and filter
- Recommended water hardness
7° German hardness, 13° French hardn.
- Chlorine content max. 100mg/lt
- PH ideal value 7

Water outlet

- Outlet tube $\varnothing 16 \times 2000$ mm
- Funnel $\varnothing 50$ with Siphon
- Dia. of outlet line d = 1"
- Outlet tube not fixed with outlet

Power connection

- Cable l = 2000 mm
- Coffee machine 230V 1LNPE 2,2kW-50/60Hz-10A
- Refrigeration unit 230V 1LNPE 70W-50/60Hz-10A

Please note

That the indicated total height of the coffee machine of 680mm is measured without the base (feet)!

Following are the total heights with:

Standard feet: = 680 mm + 30 mm = 710 mm

Plastic feet: = 680 mm + 65 mm = 745 mm

Metal feet: = 680 mm + 100 mm = 780 mm (UL / NSF)

As for the rest the local regulations are binding!



Franke Coffee Systems

The art of excellent coffeemaking

Standards models

E 1M H CF 1 Grinder, Hot water and milk system
E 1M H D CF 1 Grinder, Hot water, steam and milk system

Voltage connection

Coffee machine 230V, 1LNPE, 2,2kW, 10A, 50 / 60 Hz
Refrigerator unit 230V, 1LNPE, 70W, 10A, 50 / 60 Hz

Dimensions (WxDxH) 545 mm / 600 mm / 680 mm

Water supply

Cold water G3/8" external screw thread, l = 1,5m
Pressure 0,8 - 8,0 bar (80 - 800 kPa)
Water hardnessmax. 7°dH, 13°fH
PH 7

Drain

Drain hose d = 16 mm, l = 2000 mm

Hourly capacity

Espresso 180 Cups
Coffee 120 Cups
Hot water 20 lt.
Cappuccino 120 Cups
Café au lait 120 Cups
Macchiato 120 Cups
Hot milk (2dl) 120 Cups
Cold milk (2dl) 150 Cups

Bean container 1.5 kg capacity / Option removable

Cake drawer 50 portion of coffee ground

Boiler capacity Coffee 1.2 Lt
Hot water / steam 1.6 lt

Weight 64 kg net

Buttons 5 (6) buttons for coffee/milk products; dual function using the Shift key;
second programme selectable using a special function

Approval CE / CB / UL / NSF / CCC