


Technical Data  
Flair

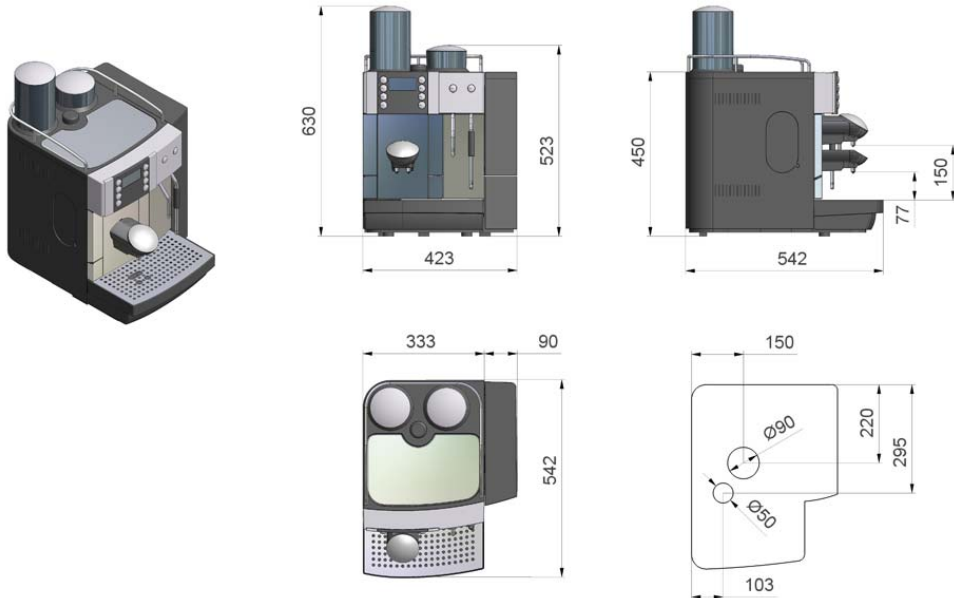

Standard Installation:

- Electrical connections: 230V, 1LNPE, 2.3kW, 10A
- Side water tank 5.5 Litres
- Drip tray 1.5 litre with monitoring

Optional Installations:

- Permanent connection to water mains in water tank
- Drainage (holes in counter)
- Coffee grounds chute (holes in counter)
- Coffee bean container expansion

As for the rest the local regulations are binding!

Holes in counter

Coffee grounds chute Ø 90

Drainage + Fresh water connection Ø 50



## Franke Coffee Systems

The art of excellent coffeemaking

### Standard models

F 2M H D CE2

2 Grinder, Hot water, Steam and Cappuccinatore CE2

### Voltage connection

230V, 1LNPE, 2,3kW, 16A, 50 (60) Hz

### Dimensions (WxDxH)

423 mm / 542 mm / 523 mm

### Water supply

side water tank 5,5lt.

### Drain

Residual water tray with monitoring

### Brewing Capacity

Espresso	2 Cups / Minute
Coffee	2 Cups / Minute
Hot water	3 dl / Minute
Cappuccino	2 Cups / Minute
Hot water	1 Cup / Minute
Macchiato	1 Cup / Minute

### Bean container

250 gr./ option 500 gr. lockable

### Cake drawer

40 portion of coffee ground

### Weight

18 kg

### Buttons

10 product keys

### Approvals

CE / CB